







Colors burnished & rockface



Standard Shapes

Available from Featherlite's Lubbock Plant, our line of premium burnished concrete masonry units.

Standard Details:

Standard chamfer dimension is 1.4" wide. Chamfers larger than 1.4" wide will require an additional charge and are considered "slopes."

Bullnose radius equals 1".


All vertical edges on a cored unit can be chamfered or bullnosed. All vertical and horizontal edges on a solid unit can be chamfered or bullnosed.

Chamfered/bullnosed edges minimize chipping and eliminate sharp corners.

Scores are 3/8" wide x 3/8" deep.

Scores shall be tuck-pointed and tooled using a concave jointer to match the head and bed joints.

Minimum return dimension for quirk miter is 1/2".

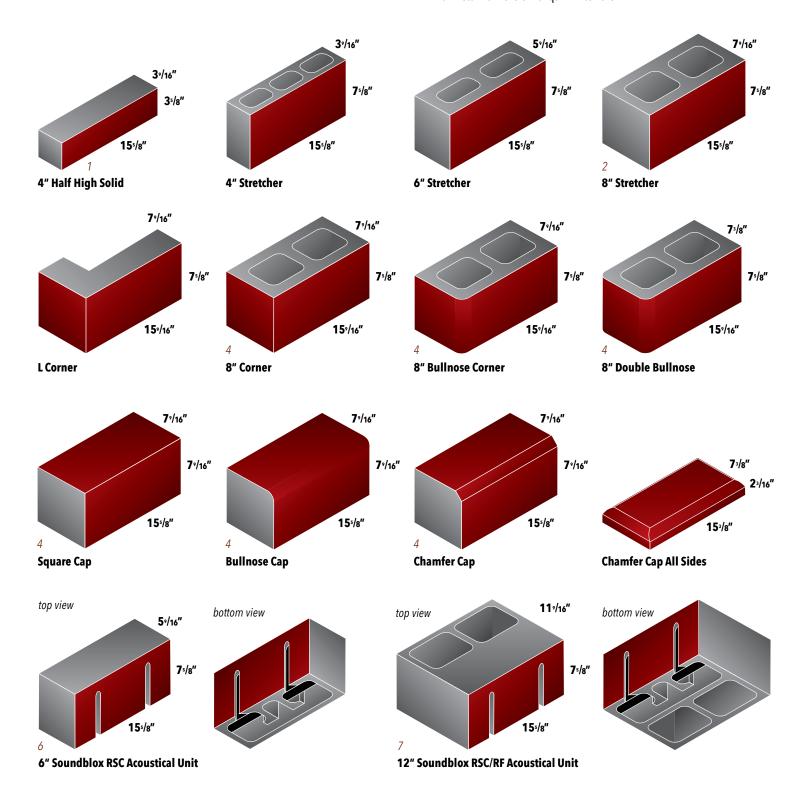




Notes:

- 1 also available: 21/4", 6", 8", 10", 12" thicknesses
- 2 also available: 2 1/4", 10", 12" thicknesses
- 3 also available: 6", 10", 12" thicknesses 4 also available: 21/4", 4", 6", 10", 12" thicknesses
- 5 with/without drip

- 6 also available: 4", 8", 12" thicknesses—cannot be vertically reinforced 7 also available in 8" thickness—can be vertically reinforced
- 8 solid units
- 9 solid units, also available: 4", 6" thicknesses



Quirk Miter

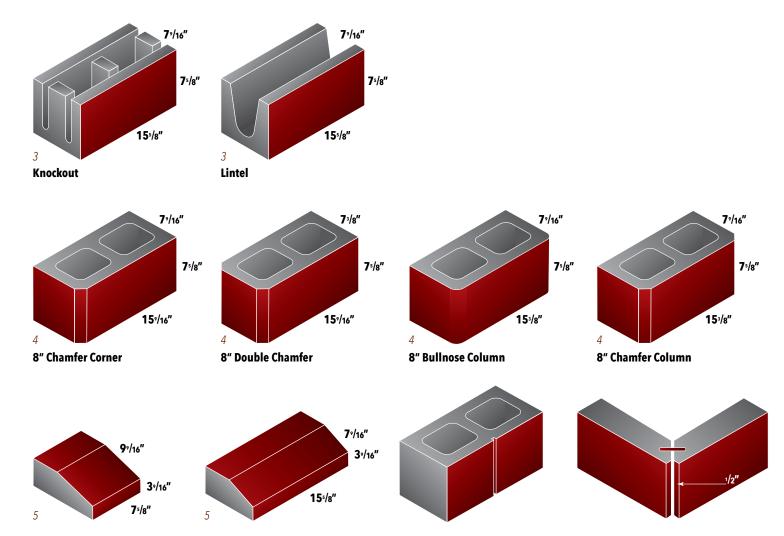

Score




8" Sill




Bullnose Detail

16" Sill

Oversized Units

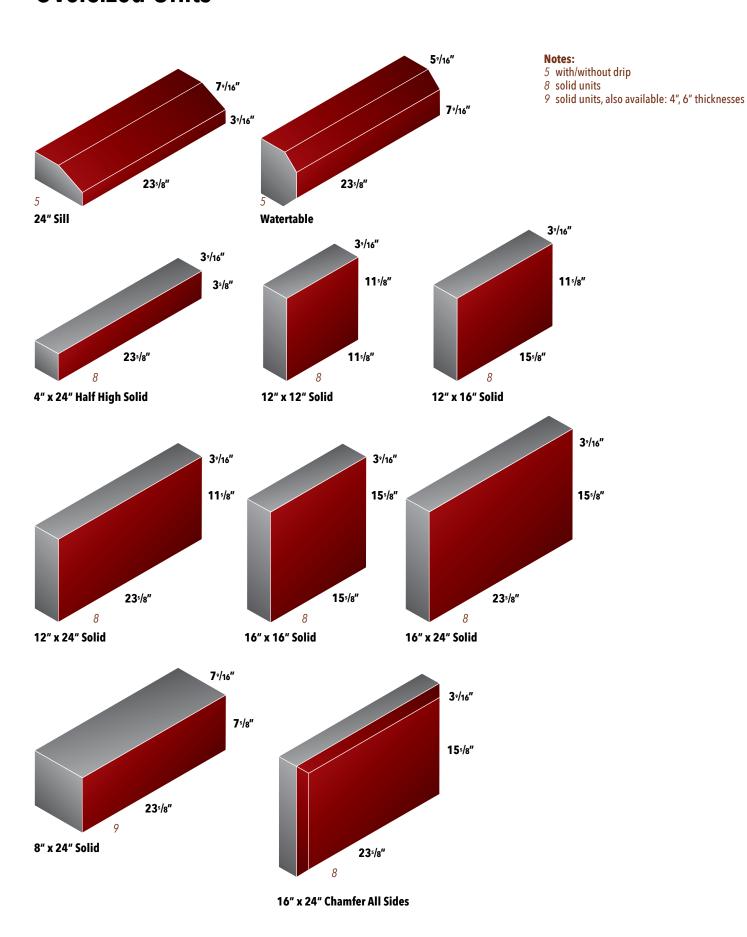

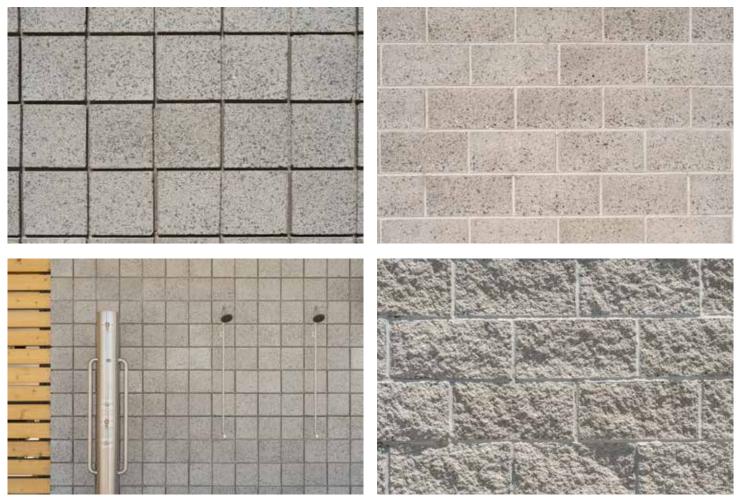

shadow gray burnised above, rockface below

shadow gray burnised above, rockface below

Highschool in Brownfield, Texas, Limestone





Graphite, Sandstone, Limestone

